

# Introducing the Gartec 1000 Lift

# GARTEC

LEADING THE PLATFORM LIFT INDUSTRY

## TECHNICAL

Type of Lift	Internal platform lift for public and commercial environments
Useage	Passenger platform lift
Environment	Internal only
Travel	Up to 13,000 mm
No. of Floors	2 - 6
Top Height	2400mm (minimum) No head fixing required
Pit / Ramp	110mm (pit or ramp)
Rated Speed	0.15m/s
Capacity	1,000kg
Drive System	Screw and Nut System with Emergency Battery Backup
Platform Controls	Constant Pressure Operation
Landing Controls	Single Press Operation
Power Req.	400v, 3-phase, 16A Soft stop-start
Shaft	Supplied, self supporting Glass or solid panels
Doors	Panoramic swing door as standard Optional fire rated door
Door Configuration	Any of 3 sides at each floor
Compliance	EN81-41 Machinery Directive Compliant Part M Compliant Class III Healthcare (sizes)

The Gartec 1000 platform lift is a 1,000kg platform lift, suitable for passengers, wheelchair users and stretchers. Carry up to 1,000kg over 13m, with doors on up to three sides. Optional extras give you design freedom, including larger doorways for powered wheelchairs and beds.

No head fixing, no machine room and quick installation make the Gartec 1000 platform lift ideal for most environments.



## DIMENSIONS

Platform Size	Total Footprint
1400 x 2500mm	1860 x 2610mm
1400 x 2000mm	1860 x 2110mm
1100 x 2200mm	1560 x 2310mm

*Bespoke / Special Sizes Available on Request*

### What do you need?

From site visits to specific drawings, show room meetings to pre-contract meetings, Gartec are experienced and ready to help however we can.



*Gartec 1000: Bike and Bed Sizes*

# Gartec 1000 Platform Lift Options

## OPTIONS & EXTRAS

- Doors** Panoramic glass door  
Fire protected door  
Optional automatic door opener  
Optional widened door (1300mm)



- Mirror** Optional mirror on cabin wall

- Rails** Black stainless steel handrails and door handles as standard  
Optional coloured rails

- Buttons** Tactile & braille floor buttons with illumination as standard



- Security** Overload protection, safety edges and battery backup as standard  
Optional key locking and restriction

- Communicate** Alarm button with telephone on platform as standard  
Intercom or autodialler options

- Destination** Optional voice & LED cabin display  
Optional LED landing display




- Shaft** Steel panels in white as standard  
Optional full glass panels  
Optional steel panels in RAL colour

- Flooring** Aluminium checkerplate as standard  
Black rubber flooring option



Gartec 1000: Light Goods Use

## PLAN VIEWS

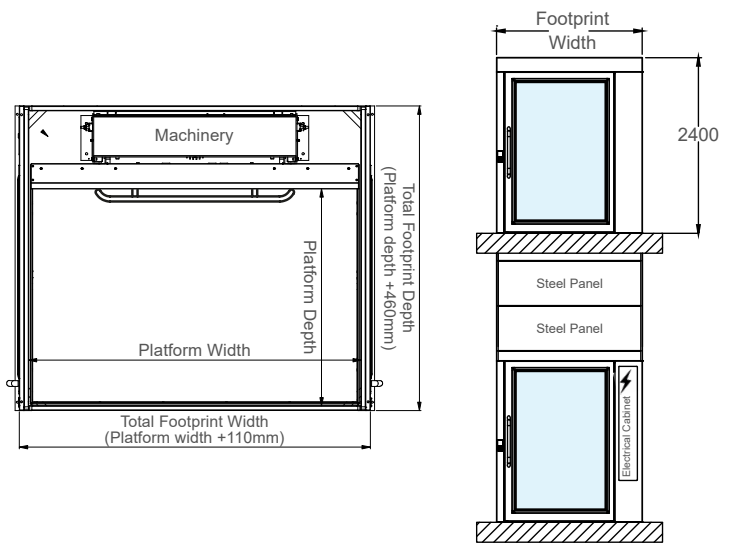

## CONFIGURATION

Configure your lift with doors on up to 3 sides over the whole travel of the lift.

*NB: maximum of 2 doors per floor can be installed.*

